


Electrobombas centrífugas biturbina

**TODO INOX.**



HXD 200T

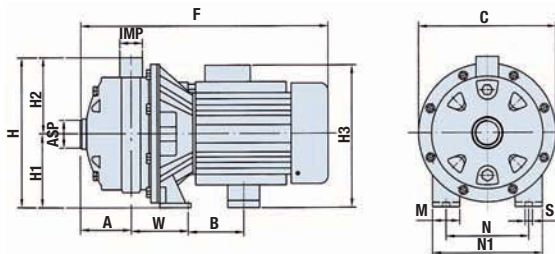

Dimensiones

Tipo	Dimensiones mm.															Peso
	A	C	F	H	H1	H2	H3	N	N1	M	S	W	D	ASP	IMP	
HXD 200T	87	235	416	252	120	132	234	39	140	180	9	94	82	G1 1/4"	G1"	17,8
HXD 200M	87	235	416	252	120	132	234	39	140	180	9	94	82	G1 1/4"	G1"	17,8
HXD 250T	87	235	416	252	120	132	234	39	140	180	9	94	82	G1 1/4"	G1"	19,6

Prestaciones y características

Tipo	Motor P2		l/min m <sup>3</sup> /h	17	33	50	67	83	100	117	133	150	167	Ø IMP Ø ASP
	kw	HP		1	2	3	4	5	6	7	8	9	10	
HXD 200T	1,5	2	m.c.a.	53,4	51,9	50	47	43,5	41,6	38,1	34,7	29,4	25,2	G 1" G 1" 1/4
HXD 200M	1,5	2		53,4	51,9	50	47	43,5	41,6	38,1	34,7	29,4	25,2	
HXD 250T	1,85	2,5		60	59	57	54,5	51	48	44	40	35	29	

M: Monofásico T: Trifásico