



Series	AGM-R	Warranty	See Warranty Terms
Volts	12	BCI	Grp 27
Cells	6		0
Terminal Type	F12(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

### Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	20 A
Maximum Charge Current	30 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	600
Marine Crank Amps (MCA) 32°F / 0°C	850
Reserve Capacity (RC @ 25A)	170 Minutes
Reserve Capacity (RC @ 75A)	40 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>110 AH</b>	<b>1.1 A</b>
@ 20 Hour Rate	<b>100 AH</b>	<b>5 A</b>
@ 10 Hour Rate	<b>90 AH</b>	<b>9 A</b>
@ 5 Hour Rate	<b>82 AH</b>	<b>16.40 A</b>

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.75 VPC	55	32.72	25	20.21	17.22	11.58	9.62


### Specifications

	Weight	27 kg	59.5 lbs
	Length	307 mm	12.09"
	Width	169 mm	6.65"
	Height Inc. Term.	2150 mm	8.46"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

### Cycle Life vs. Depth of Discharge

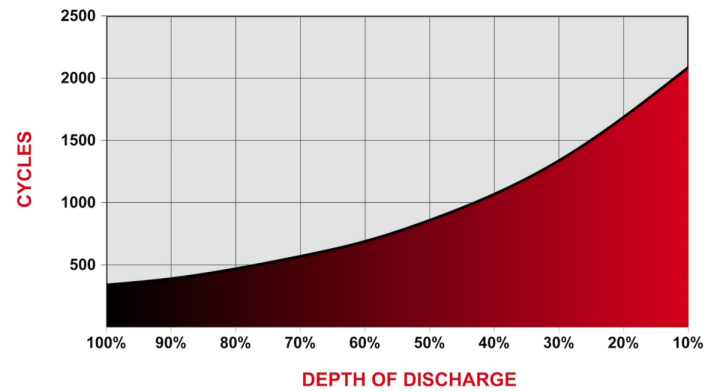

### Capacity vs. Temperature

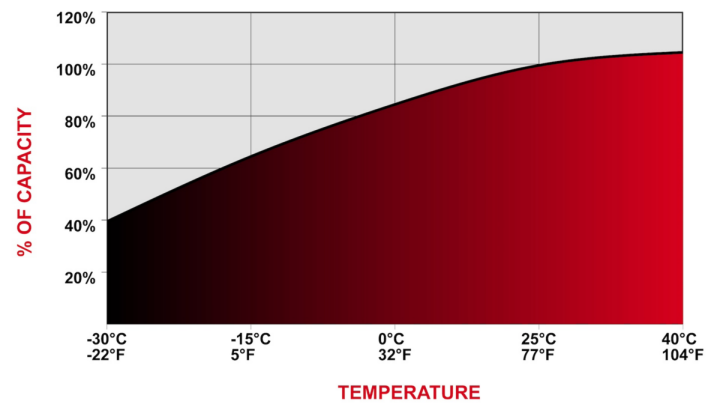

ISO 9001



ISO 14001



OHSAS 18001



MH 28539